



You must install a 30 mA residual-current device (RCD).

	No.	Art. No.	IFS name	Pcs
	1	AKU2647	Led housing with seal	15
	2	AKU2219	Nut for ledhouse	15
	3	AF00045	pillow holder	2
	4	AKU1893	On-Off tap house 33 transparent V2	2
	5	AKU2437	Cup Holder Light - lens wellis 2020	2
	6	AKU2438	Cup Holder Light nut	2
	7	AKU2697	Underwater light housing	1
	8	AKU2692	Cap for underwater light Web/City	1
	9	AKU1891	Water Diverter 60 - LED lighted V2	1
	10	AKU1892	Air Regulator - house led lighted V2	4
	11	AKU1830	Filter house for floating 50 sqf filters	1
	12	ABE0505	Beszívófej ház 2" Króm (magas) tömítéssel V2	3
	13	AJ00281	Sealing for self adjusting suction head nut Life	3
	14	AJ00280	Self adjusting nut for suction head Life	3
	15	AJ00291	Jet ozone with sealing V2	1
	16	AJ00282	Jet water circulation self-levelling medium gray for life	1
	17	AJ00284	Circulation jet washer self-aligning 48 Life	1
	18	AJ00283	Circulation jet nut self-aligning 48 Life	1
	19	AKU0084	Water Drain - 20 RB V2	1
	20	ABE0621	Ozon mixer - Housing	1
	21	ABE0620	Mixer housing	1
	22	ACM0959	Control Panel - IN.K500 GECKO	1
Optional	23	ACM0875	Grille for speaker 3" (2 way)	2
Optional	24	ACM0874	Speaker 3" (2 way)	2
	25	AJ00214	Jet 2" - transparent 1 Hole transparent V3 Wellis	30
	26	AJ00216	Jet 3" - transparent 1 Hole V3 Wellis	12
	27	AJ00217	Jet 3" - transparent 1 Hole Rotation transparent V3 Wellis	4
	28	AJ00219	Jet 5" - transparent 1 Hole rotational transparent V3 Wellis	4
	29	AKU1832	Filter House - Skimmer Cover round	1
	30	AKU1842	Skimmer house with Wellis logo	1
	31	AKU1896	On-off tap grip Wellis V2	2
	32	AKU1895	Air regulator grip Wellis V2	4
	33	AKU1894	Water Diverter - Grip Wellis V2	1
	34	AF00061	Pillow 300x126x54 white ribbed	3
	35	ASE0088	Pillow Holder - 17	3
	36	ACM0734	Spa Pump 3 HP - One Speed 60 Hz	1
	37	ACM0902	Circulation pump WTC50M 250 W 60Hz	1
	38	ACM1054	Control box IN.YE-3 Gecko (4Kw) 60Hz V3	1

Product family: **Wellis\CityLife**

Sheet name: <b>Prague Life USA spa</b>			Projection 	 Wellis Magyarország Zrt.
File name: <b>FJ_WM00803_ENG_Prague_life_USA_medence</b>				
Dimension SPA: <b>2000x2000x890 mm</b>		Min.El. nds: <b>240 V - 30A - 60Hz / Opt.El. needs: 240V - 40A - 60Hz</b>		
Weight of the SPA: <b>280 kg</b>		<b>Raklap - AE00091</b>	<b>Control box: GECKO YE3 + INK500 -4KW</b>	
Rim height: <b>115 mm</b>	Approved by: <b>Ress Tamás</b>		Pr. No: Fe. No:	Number: <b>WM00803</b>
Created: <b>2024. 04. 16.</b>	Drawer: <b>ress.tamas - 2024. 04. 15. 15:52:45</b>		<b>A3</b>	<b>M 1:20</b>
			<b>page 1 / 2</b>	


1 person ~75 kg  
Water disp.: **450 kg**  
Minimum water: **1200 liter**

INSTALLATION INSTRUCTIONS

Installation, connection and electrical installation can be done only by professionals!  
The given dimensions are for information only, they may differ from reality due to the manufacturing technology of pools.

ATTENTION!

Pools can be installed only when electric schock protection compliance of the installed residual-current device is stated by the installation personnel in written form.

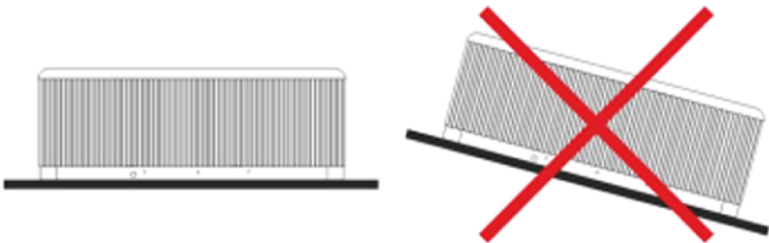

1. General installation instructions

A solid, level base (maximum 0.5% slope) is essential for setting up the pool. Make sure the cover or base is properly supporting the pool.  
For this, you need to know the maximum load capacity of the cover. Consult a qualified architectural professional or structural engineer. To determine the weight, contents and parts of the pool, refer to the data table of the pool. This weight should not exceed the calculated static capacity per square meter, otherwise it may cause serious damage to the pool and the substrate. **60 cm of space is required around the pool provided for servicing**, if this cannot be done, in the event of servicing, advance notice must be given and access to the pool must be ensured! It is advisable to create a water confluence on the outlet side of the pool. Its purpose is to drain rainwater and splashing water from around the pool, and also to allow the water to flow away in case the pool is lowered at the bottom outlet.

a. Indoors/Basement

In case of placing the pool inside a building take into consideration the following requirements: The base must have a proper drain channel to prevent water collecting around the pool.  
Incase a new place is buil for the pool, it is strongly recommended to install a floor drain to prevent damage due to water overflow or mechanical failure, etc.  
If no floor drain is installed, our Company takes no responsibility for occuring damages.  
Inside the room where the pool is installed, humidity can increase significantly. To prevent precipitating water and the occurance of fungus, proper ventillation of the room is highly recommended.  
It is also suggested to install a dehumidifier device in the room. Acryl absorbs heat from the sun rapidly, due to which the pool can suffer significant heat damage. In case the pool is installed between glass structures, please prevent the sunrays to reach the pool directly through the glass, otherwise temperatures can rise too high.

b. Outdoors/Closed terrace

If the pool is installed outdoors, it is recommended to build a horizontal, reinforced concrete base with min. 10-15 cm thickness. Do not expose the empty pool direct sunlight without proper protection (thermal cover on top). Please keep in mind that long term exposure to sunlight will damage the pool and its accessories.

c. Recessed installation

In case of recessed installation a 60 cm wide manhole must be built around the pool for proper access and servicing.  
Only the part of the pool that is under the acrylic rim can be recessed. In case these conditions are not met, installation of the pool may fail!  
It is appropriate to make the drain channel in the base on the drain side of the pool. Its purpose is to take away splash water around the pool, or drain the released water.  
It is also necessary to provide water drainage in the manhole.  
The manhole should also ventillate properly. It is recommended to install an exhaust fan or other ventillation device.  
If raising the pool from its recessed place is neccessary, the customer is responsible for all related expenses.

2. Electrical installation

You must install a circut breaker dedicated only for the pool, no other devices allowed to connect. You must also install a 30mA residual-current device (RCD).

Check your product type: WM00803 Prague Life USA  
Check the minimal electric needs of your product: 240V 30A 60Hz  
Check the optimal electric needs of your product: 240V 40A 60HZ  
Based on the information above, choose the appropriate cable size for your product.

For electric installation in case of cables not exceeding 10 meters in length, the appropriate cable cross section and length is given in the table on the right.

- For cable legths exceeding 10 meters please consult a professional!
- In all cases, the electrical installation of the pool has to be done by an electritian.
- In case the optimal energy needs of the pool are met: the Spa pump and heating can work simultainously.
- In case only the minimal energy needs of the pool are met: the Spa pump and heating can not work simultainously.
- Installing the cables is recommended through the bottom cover (tray) by drilling a hole and using a cable gland. Recommended direction is shown on the drawing.
- Min. cable length for installation is 3 m.
- The exact way of electrical installation is always unique, highly dependant on the location and environment of the pool.



Additional electrical installation (cable, circuit breaker and residual-current device) is the customer's responsibility.  
These parts are not included in the pool packaging, need to be purchased separately.  
Every pool has a dedicated installation drawing.  
Make sure that the pool is connected to a 30 mA residual-current device.  
Use copper wiring only.

If a fuse fails, replace it only with same type of fuse with same technical parameters.  
The device must be connected to the house's Equipotential Bonding Grid.

We inform you that the functioning of Spa pumps listed in the bill of materials on the first page may differ from reality. For example, if 'ACM0394 Spa Pump 3/0.6 HP - Two Speed' pump is listed as two speed, but in reality it only works with one speed, that might be because for the best massage experience a bigger influx of water is needed, thus the pump will work with its highest speed.

Kábel keresztmetszet/ Cable profile		
1x16A	3x2,5mm <sup>2</sup>	230 V
1x20A	3x4mm <sup>2</sup>	230 V
1x25A	3x4mm <sup>2</sup>	230 V
3x16A	5x4mm <sup>2</sup>	400 V

Product family: Wellis\CityLife

Sheet name: INFO_ENG				Projection 		 Wellis Magyarország Zrt.		
File name: FJ_WM00803_ENG_Prague_life_USA_medence								
Dimension SPA: 2000x2000x890 mm		Min.El. nds: 240 V - 30A - 60Hz / Opt.El. needs: 240V - 40A - 60Hz						
Weight of the SPA: 280 kg		Raklap - AE00091		Control box: GECKO YE3 + INK500 -4KW				
Rim height: 115 mm		Approved by: Ress Tamás		Pr. No: Fe. No:		Number: WM00803		B
Created: 2024. 04. 16.		Drawer: ress.tamas - 2024. 04. 15. 15:52:45			A3		M 1:15	page 2 / 2